

HWT-1A-LHB

Analogue Weatherproof Telephone



Features

- SMC housing with high mechanical strength and impact resistance.
- Heavy duty handset with hearing aid compatible receiver, noise canceling microphone.
- Silicone rubber keypad and magnetic hook switch.
- Full keypad with memory, 0-9 buttons can be programmed as speed dial button.
- Rotation mounting closure, weatherproof grade is IP66/IP67.
- LED, Beacon and loudspeaker option.
- Lightning protection to ITU-T recommendation K.21.
- Powder coated in UV stabilized polyester finish.
- The size and style of weatherproof telephone can be customized according to customer demand.

Specification

Ambient Temperature	-30 to +70 degree C
Relative Humidity	10% ~ 95%
Atmospheric Pressure	86 – 106kpa
Sound Level of Ringing	>80dB (A)
Standard Frequency	Low frequency group 697, 770, 852, 941Hz. High frequency group 1209,1336,1477Hz.
Frequency Deviation	-1.5% ~ +1.5%
Call Transmission Index	(5Km) SLR<12, RLR<-1, STMR>10, output impedance is 600ohm
MTBF	100.000 Hours
MTTR	2 Hours

Operation

- After pick up the handset, once dial tone heard, dial the number using keypad
- Normal Telephone Operation

Regulatory Approvals (Pending)

CE
RoHs
FC


Ordering Information

Available Model	Description	
HWT-1A-LHB	L (LED)	: 1 = Yes, 0 = No
	H (Horn)	: 1 = Yes, 0 = No
	B (Beacon)	: 1 = Yes, 0 = No

Packing

Unit Size : 356 x 273 x 125mm
Net Weight : 6.9Kg
Packing Size : 370x300x150mm
Gross weight : 7.5Kg
Packing box : Carton Box

Dimension

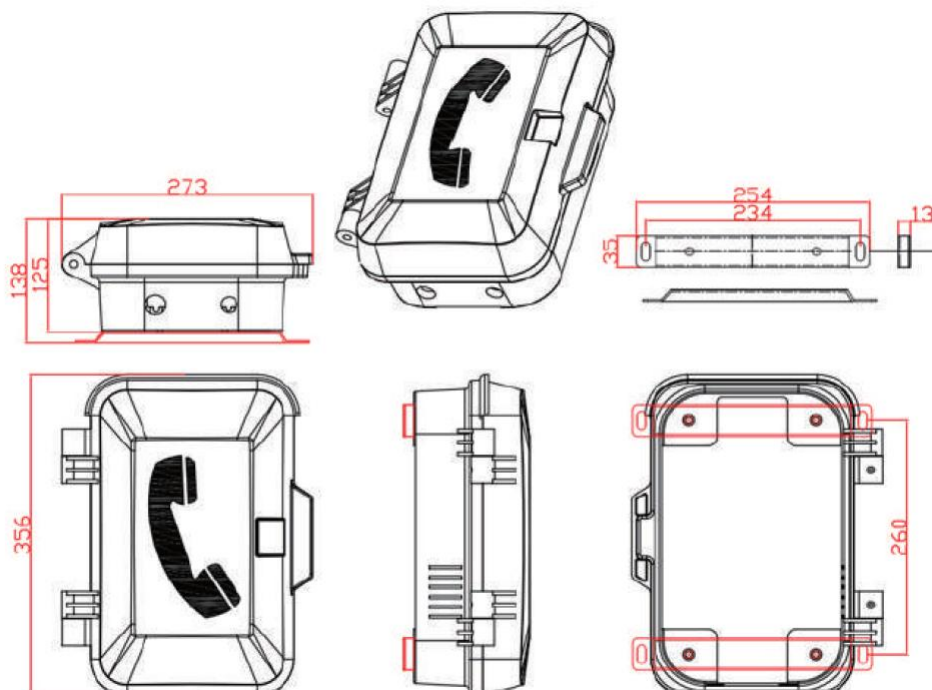

Hepda Pte Ltd, 2024

Due to continuous improvement, all product specifications are subject to change without further notice.