

HWT-01V-LHB

VoIP Weatherproof Telephone



Features

- SMC housing with high mechanical strength and impact resistance.
- Heavy duty handset with hearing aid compatible receiver, noise canceling microphone.
- Silicone rubber keypad and magnetic hook switch.
- Full keypad with memory, 0-9 buttons can be programmed as speed dial button.
- Rotation mounting closure, weatherproof grade is IP66/IP67.
- Beacon and loudspeaker option
- LED Option
- Lightening protection to ITU-T recommendation K.21.
- Powder coated in UV stabilized polyester finish.

Specification

Communication	Full Duplex
SIP Support	SIP2.0(RFC3261)
Speed Coding	G.711A/u,G.7321 high/low,G.729 a/b,G.722,G.722.1,G726
Echo Cancellation code	G.167/G.168
Circumstance noise	≤ 60dB(A)
Sound Level of Ringing	> 90dB (A)
Auxiliary Contact	1Aux output, dry Contact
Power Supply	AC110-240V or POE
Rated Carry Current	1A
DTMF	VoIP SIP Info DTMF Relay, RFC2833
LAN Protocols	Power Over Ethernet (POE, 802.3af)
WLAN	IEEE802.3af
Network Access Control	IEEE802.1x
IP Protocols	IPV4, UDP, DHCP, SIP
MTBF	100.000 Hours
MTTR	2 Hours

Operation

- Programming and Configuration through web GUI
- Management and operation: DHCP and Static IP, remote automatic software upgrade

Regulatory Approvals (Pending)

CE
RoHs
FC


Ordering Information

Available Model	Description
HWT-1V-LHB	L (LED) : 1 = Yes, 0 = No
	H (Horn) : 1 = Yes, 0 = No
	B (Beacon) : 1 = Yes, 0 = No

Packing

Unit Size : 356 x 273 x 125mm
Net Weight : 6.9Kg
Packing Size : 370x300x150mm
Gross weight : 7.5Kg
Packing box : Carton Box

Dimension

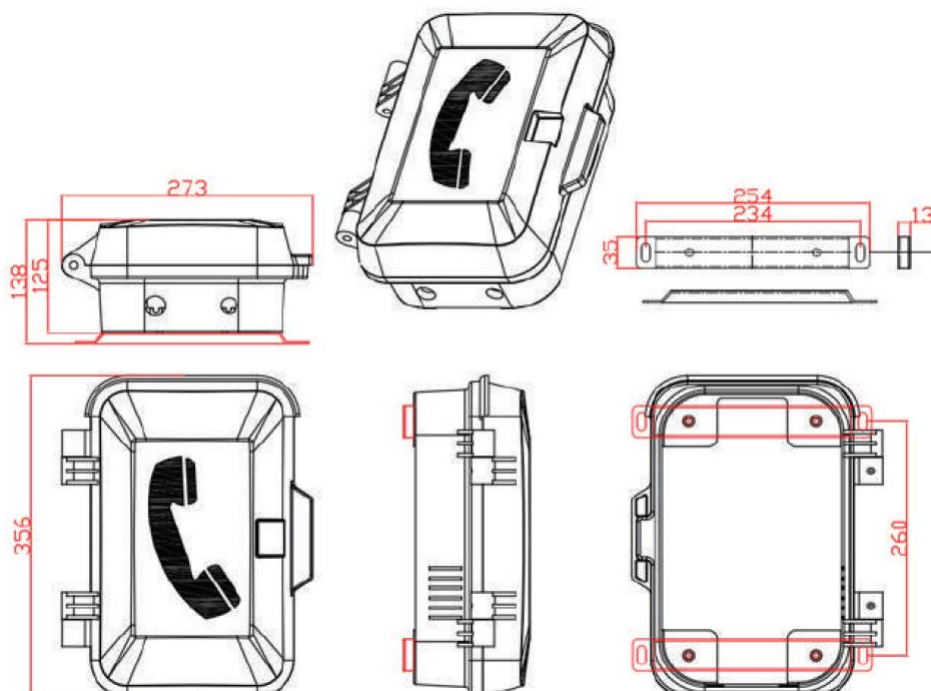

Hepda Pte Ltd, 2024

Due to continuous improvement, all product specifications are subject to change without further notice.